


# Lift-Box Dor-Les® Universal Density Press (High-Capacity)

Setting the standard for capacity, performance, and reliability in gins around the world.

- The High-Capacity Lummus Lift-Box Dor-Les® Press is a down-packing, universal density press, which offers greater capacity options for gins processing as much as 60-BPH.
- Using technology pioneered by Lummus, the box is lifted off the bale and held out of the way by a pair of 5" (127 mm) diameter mill-type hydraulic cylinders during final compression and bale tying.
- Final compression by the 14" (356 mm) diameter x 89" (2,261 mm) stroke double-acting cylinder takes place without friction created by side walls, resulting in uniform density throughout the bale and a lower energy requirement to compress the bale.
- Each Dor-Les® box is a single, solid weldment. The elimination of doors, door latches, and hinges means fewer parts to maintain and replace.
- The down-packing design eliminates the need for a press pit, reducing installation costs/problems.

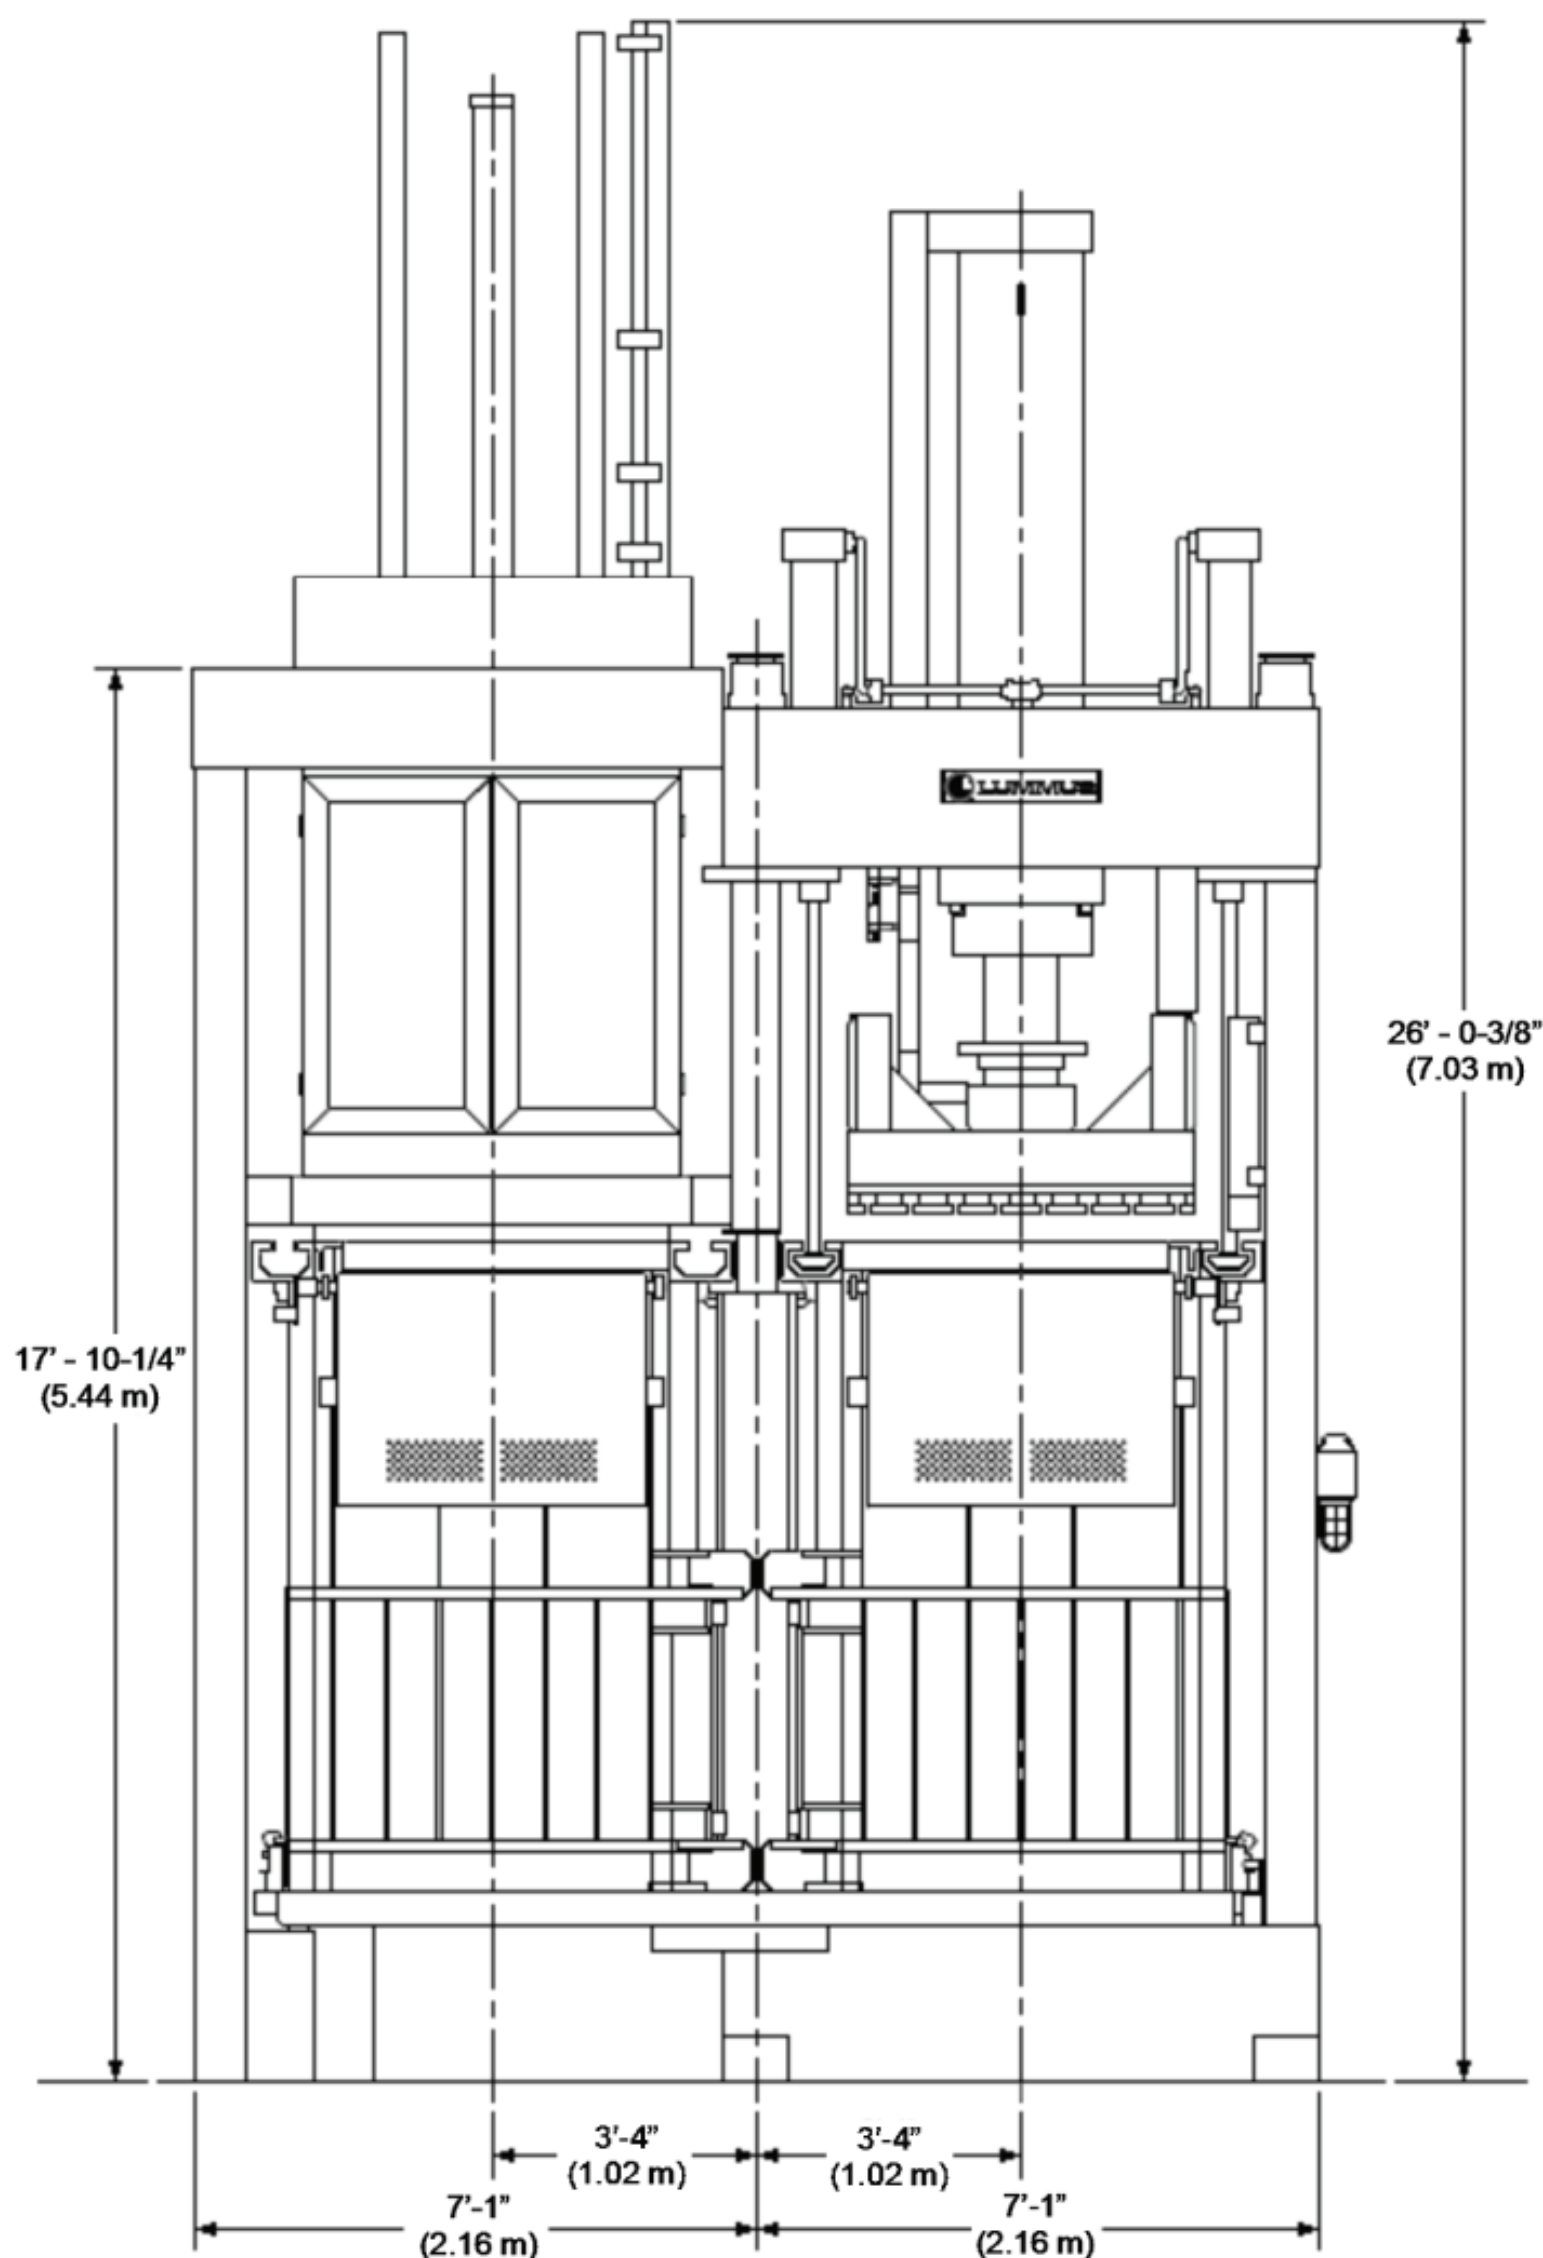

Front Elevation of High-Capacity Lift-Box Dor-Les® Press with dimensions




High-Capacity Lift-Box Dor-Les® Press (shown with Premier™ III Series Press Console and Bale Moisture Monitor)

## Features:

- 54" (1,372 mm) wide Hydraulic Lint Pusher is standard, typically fed by a Super Hi-Capacity Lint Feeder (optional – additional cost).
- Hydraulic Trampler with 4" (102 mm) diameter x 85" (2,159 mm) stroke cylinder.
- 3-HP AC Power Turning with Inverter Drive is standard, while a UHS (Ultra High-Speed) Servo Turning system is optional (additional cost).
- Pneumatic Bale Eject.
- Service Platform/Support Structure is standard.
- PLC-based Premier™ III Series-style Control Console with Magelis Touch-Screen Operator Interface is standard. A PLC-based Control Console with push-button interface is available (additional cost).
- For applications up to 50-BPH, a single multi-purpose HCLB hydraulic pumping unit is standard, which features a 125-HP motor driving the Pusher and Trampler section and 125-HP motor powering the Press section.
- For applications in excess of 60-BPH, the UHC (Ultra High-Capacity) hydraulic booster circuit with a 75-HP motor is added to the multi-purpose pumping unit.
- Both pumping unit configurations feature a 1200-gallon (4,542 liter) reservoir and a 7.5-HP circulation pump circuit.



Physical Address: 225 Bourne Boulevard • Savannah, Georgia 31408-9586 USA  
Mailing Address: P. O. Box 929 • Pooler, Georgia 31322-0929 USA  
Phone: (912) 447-9000 • Fax: (912) 447-9250  
Toll Free (USA Only): 1-800-4LUMMUS (1-800-458-6687)  
Web Site: [www.lummus.com](http://www.lummus.com) • E-mail: [lummus.sales@lummus.com](mailto:lummus.sales@lummus.com)



Lummus products described or listed in this publication are illustrative only. Application and use of these products must be in accordance with the applicable codes and regulations and must be arranged and/or provided with covers and other guards where necessary to assure the safety of personnel. Lummus engineers continue to make improvements. All designs, specifications, and ratings are subject to change without notice.